


HOOK & HOOK TURNBUCKLES

- Drop forged.
- Hot dipped galvanized.
- Meets design and performance requirements of ASTM F 1145 Class E.
- See Warnings "Turnbuckles" on Page 8 for proper use and selection.

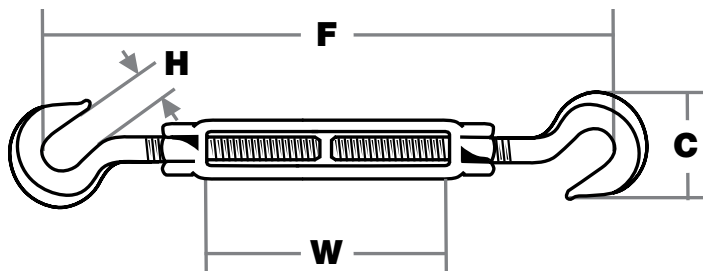

Indusco Part #	Threaded Dia. x Take-up (inches)	C	F Closed	H	W	Weight Each	Working Load Limit*
939 00001	1/4 x 4	1.27	7.12	.45	4.00	.30	400
939 00036	5/16 x 4-1/2	1.50	8.31	.50	4.50	.63	700
939 00081	3/8 x 6	1.77	10.50	.56	6.00	.79	1,000
939 00131	1/2 x 6	2.28	11.82	.66	6.00	1.42	1,500
939 00161	1/2 x 9	2.28	14.82	.66	9.00	1.83	1,500
939 00186	1/2 x 12	2.28	17.82	.66	12.00	2.01	1,500
939 00221	5/8 x 6	2.81	13.25	.90	6.00	2.61	2,250
939 00251	5/8 x 9	2.81	16.25	.90	9.00	2.81	2,250
939 00276	5/8 x 12	2.81	19.25	.90	12.00	3.12	2,250
939 00311	3/4 x 6	3.33	14.88	.98	6.00	3.89	3,000
939 00341	3/4 x 9	3.33	17.88	.98	9.00	4.68	3,000
939 00371	3/4 x 12	3.33	20.88	.98	12.00	5.70	3,000
939 00401	3/4 x 18	3.33	26.88	.98	18.00	7.25	3,000
939 00446	7/8 x 12	3.78	22.25	1.13	12.00	8.10	4,000
939 00471	7/8 x 18	3.78	28.25	1.13	18.00	9.95	4,000
939 00492	1 x 6	4.25	17.63	1.25	6.00	9.33	5,000
939 00506	1 x 12	4.25	23.63	1.25	12.00	11.45	5,000
939 00536	1 x 18	4.25	29.63	1.25	18.00	13.20	5,000
939 00566	1 x 24	4.25	35.63	1.25	24.00	15.9	5,000

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

▲ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.