


HOOK & EYE TURNBUCKLES

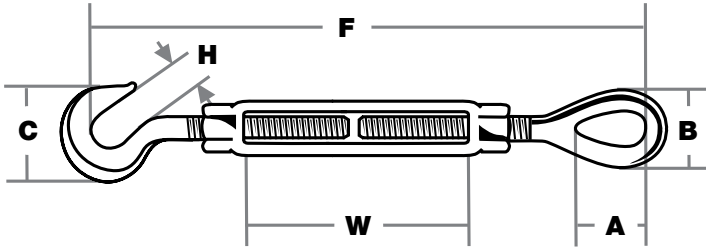

- Drop forged.
- Hot dipped galvanized.
- Meets design and performance requirements of ASTM F 1145 Class F.
- See Warnings “Turnbuckles” on Page 8 for proper use and selection.

Indusco Part #	Threaded Dia. x Take-up (inches)	A	B	C	F Closed	H	W	Weight Each	Working Load Limit*
939 00006	1/4 x 4	.78	.34	1.27	7.81	.45	4.00	.30	400
939 00041	5/16 x 4-1/2	.94	.44	1.50	9.38	.50	4.50	.63	700
939 00086	3/8 x 6	1.12	.53	1.77	11.63	.56	6.00	.79	1,000
939 00136	1/2 x 6	1.44	.72	2.28	13.13	.66	6.00	1.42	1,500
939 00166	1/2 x 9	1.44	.72	2.28	16.13	.66	9.00	1.83	1,500
939 00191	1/2 x 12	1.44	.72	2.28	19.13	.66	12.00	2.01	1,500
939 00226	5/8 x 6	1.75	.88	2.81	14.56	.90	6.00	2.61	2,250
939 00256	5/8 x 9	1.75	.88	2.81	17.56	.90	9.00	2.81	2,250
939 00281	5/8 x 12	1.75	.88	2.81	20.56	.90	12.00	3.12	2,250
939 00316	3/4 x 6	2.09	1.00	3.33	16.38	.98	6.00	3.75	3,000
939 00346	3/4 x 9	2.09	1.00	3.33	19.38	.98	9.00	4.68	3,000
939 00376	3/4 x 12	2.09	1.00	3.33	16.38	.98	12.00	5.70	3,000
939 00406	3/4 x 18	2.09	1.00	3.33	28.38	.98	18.00	5.70	3,000
939 00451	7/8 x 12	2.38	1.25	3.78	23.94	1.13	12.00	7.25	4,000
939 00476	7/8 x 18	2.38	1.25	3.78	29.94	1.13	18.00	8.10	4,000
939 00500	1 x 6	3.00	1.44	4.25	19.97	1.25	6.00	9.95	5,000
939 00511	1 x 12	3.00	1.44	4.25	25.81	1.25	12.00	10.40	5,000
939 00541	1 x 18	3.00	1.44	4.25	31.81	1.25	18.00	13.20	5,000
939 00571	1 x 24	3.00	1.44	4.25	37.81	1.25	24.00	15.90	5,000

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL 1-800-727-0665 TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.