


EYE & EYE SWIVELS

- Drop forged.
- Hot dipped galvanized.
- Intended for use as positioning devices and are not intended to rotate under load.
- Meets performance requirements of federal specifications RR-C-271.
- See Warnings "Swivels" on Page 8 for proper use and selection.

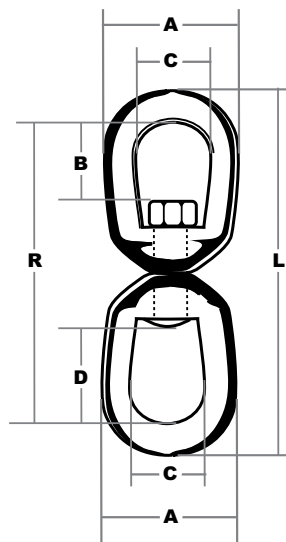

Indusco Part #	Trade Size	A	B	C	D	L	R	Weight Each	Working Load Limit*
863 00001	1/4	1.25	.75	.75	1.06	3.38	2.88	.20	850
863 00006	5/16	1.63	.75	1.00	1.25	4.13	3.63	.40	1,250
863 00011	3/8	2.00	1.00	1.25	1.50	5.00	4.25	.75	2,250
863 00016	1/2	2.50	1.25	1.63	1.94	6.75	5.75	1.40	3,600
863 00021	5/8	3.00	1.63	1.75	2.38	8.00	6.75	2.49	5,200
863 00026	3/4	3.50	1.75	2.00	2.50	8.75	7.25	4.02	7,200
863 00031	7/8	4.00	2.13	2.25	3.06	10.38	8.75	6.25	10,000
863 00036	1	4.50	2.25	2.50	3.50	11.75	9.75	8.95	12,500
863 00041	1-1/4	5.63	3.25	3.13	3.88	13.94	11.50	16.37	18,000
863 00046	1-1/2	7.00	3.88	4.00	4.19	20.00	17.13	45.79	45,200

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.