


JAW & EYE SWIVELS

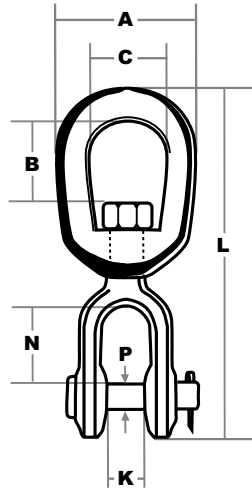

- Drop forged.
- Hot dipped galvanized.
- These swivels are positioning devices and are not intended to rotate under load.
- Meets performance requirements of federal specifications RR-C-271.
- See Warnings “Swivels” on Page 8 for proper use and selection.

Indusco Part #	Trade Size	A	B	C	K	L	N	P	Weight Each	Working Load Limit*
863 00051	1/4	1.25	.75	.75	.50	3.16	.75	.25	.30	850
863 00056	5/16	1.63	.75	1.00	.56	3.75	.81	.31	.40	1,250
863 00061	3/8	2.00	1.00	1.25	.63	4.63	1.06	.38	.70	2,250
863 00066	1/2	2.50	1.25	1.50	.88	6.13	1.38	.50	1.40	3,600
863 00071	5/8	3.00	1.63	1.75	.94	7.38	1.50	.63	2.50	5,200
863 00076	3/4	3.50	1.75	2.00	1.13	8.31	1.75	.75	4.20	7,200
863 00081	7/8	4.00	2.13	2.25	1.19	9.63	2.06	.88	5.87	10,000
863 00086	1	4.50	2.25	2.50	1.75	11.63	2.44	1.13	11.00	12,500
863 00088	1-1/4	5.63	2.75	3.13	2.19	12.44	2.81	1.38	17.00	18,000
863 00096	1-1/2	7.00	3.88	4.00	2.88	20.84	4.40	2.25	54.75	45,200

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
All measurements/units listed are in inches/pounds unless otherwise noted.