


WIRE ROPE SLINGS

VERTICAL, CHOKER, VERTICAL BASKET

FLEMISH SPLICE IWRC

• Rated capacities shown below apply only to 6x19 and 6x36 classification wire rope.

Rope Diameter	Vertical		Choker		Vertical Basket	
	Rated capacity in tons of 2,000 lbs.					
	IPS	EIPS	IPS	EIPS	IPS	EIPS
1/4	0.56	0.65	0.41	0.48	1.1	1.3
5/16	0.87	1.0	0.64	0.74	1.7	2.0
3/8	1.2	1.4	0.92	1.1	2.4	2.8
7/16	1.7	1.9	1.2	1.4	3.4	3.8
1/2	2.2	2.5	1.6	1.9	4.4	5.0
9/16	2.8	3.2	2.0	2.4	5.5	6.4
5/8	3.4	3.9	2.5	2.9	6.8	7.8
3/4	4.9	5.6	3.6	4.1	9.7	11
7/8	6.6	7.6	4.8	5.6	13	15
1	8.5	9.8	6.3	7.2	17	19.6
1-1/8	10	12	7.9	9.1	20	24
1-1/4	13	15	10	11	26	30
1-3/8	15	18	12	13	30	36
1-1/2	18	21	14	16	36	42
1-3/4	25	28	19	21	50	56
2	32	37	24	28	64	74
2-1/4	39	44	30	35	78	88
2-1/2	47	54	37	42	94	108
2-3/4	57	65	44	51	114	130
3	67	77	52	60	134	154

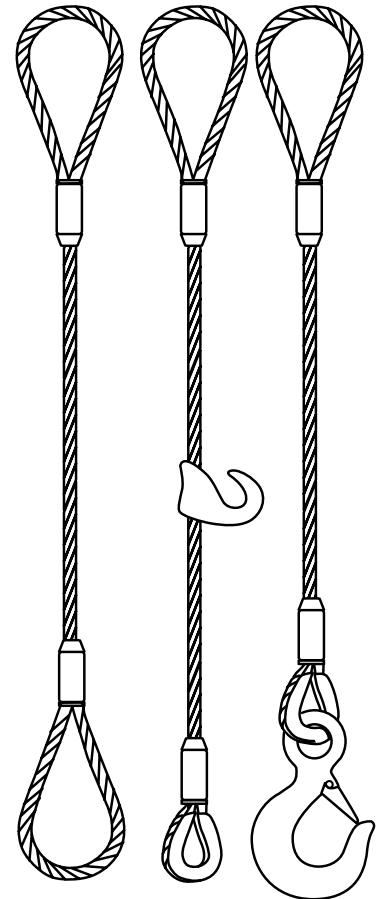

RATED CAPACITIES BASKET HITCH BASED ON D/d* RATIO OF 25

RATED CAPACITIES BASED ON PIN DIAMETER NO LARGER THAN NATURAL EYE WIDTH OR LESS THAN THE NOMINAL SLING DIAMETER

RATED CAPACITIES BASED ON DESIGN FACTOR OF 5:1

HORIZONTAL SLING ANGLES LESS THAN 30 DEGREES SHALL NOT BE USED

*D/d= Diameter of Rope in relation to diameter of object to be lifted

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.