





WIRE ROPE SLINGS

2 - LEG BRIDLE

FLEMISH SPLICE IWRC

• Rated capacities shown below apply only to 6x19 and 6x36 classification wire rope.

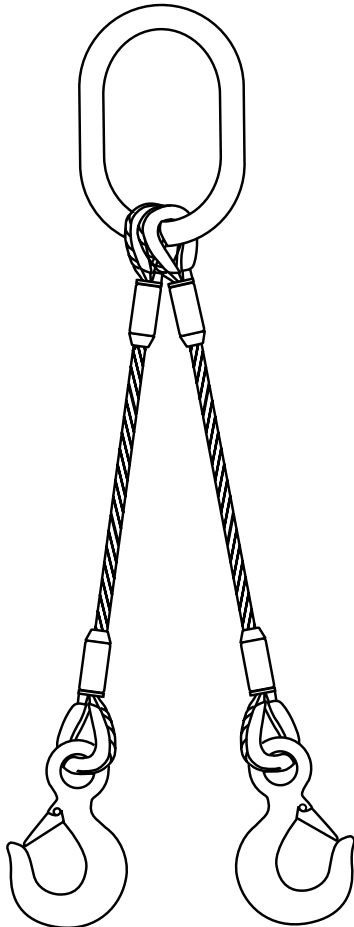

Rope Diameter	60°		45°		30°	
	  					
	Rated capacity in tons of 2,000 lbs.					
	IPS	EIPS	IPS	EIPS	IPS	EIPS
1/4	0.97	1.1	0.79	0.91	0.56	0.65
5/16	1.5	1.7	1.2	1.4	0.87	1.0
3/8	2.2	2.5	1.8	2.0	1.2	1.4
7/16	2.9	3.4	2.4	2.7	1.7	1.9
1/2	3.8	4.4	3.1	3.6	2.2	2.5
9/16	4.8	5.5	3.9	4.5	2.8	3.2
5/8	5.9	6.8	4.8	5.5	3.4	3.9
3/4	8.4	9.7	6.9	7.9	4.9	5.6
7/8	11	13	9.3	11	6.6	7.6
1	15	17	12	14	8.5	9.8
1-1/8	18	21	15	17	10	12
1-1/4	22	26	18	21	13	15
1-3/8	27	31	22	25	15	18
1-1/2	32	37	26	30	18	21
1-3/4	43	49	35	40	25	28
2	55	63	45	52	32	37
2-1/4	67	77	55	63	39	44
2-1/2	82	94	67	77	47	54
2-3/4	98	113	80	92	57	65
3	115	133	94	108	67	77

RATED CAPACITIES BASKET HITCH BASED ON *D/d RATIO OF 25

RATED CAPACITIES BASED ON PIN DIAMETER NO LARGER THAN NATURAL EYE WIDTH OR LESS THAN THE NOMINAL SLING DIAMETER

RATED CAPACITIES BASED ON DESIGN FACTOR OF 5:1

HORIZONTAL SLING ANGLES LESS THAN 30 DEGREES SHALL NOT BE USED

*D/d= Diameter of Rope in relation to diameter of object to be lifted

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.