


WIRE ROPE SLINGS

3 - LEG BRIDLE

FLEMISH SPLICE IWRC

- Rated capacity in tons of 2,000 lbs. Rated capacities shown apply only to 6x19 and 6x36 classification wire rope.

Rope Diameter	60°		45°		30°	
	Rated capacity in tons of 2,000 lbs.					
	IPS	EIPS	IPS	EIPS	IPS	EIPS
1/4	1.5	1.7	1.2	1.4	0.84	0.97
5/16	2.3	2.6	1.8	2.1	1.3	1.5
3/8	3.2	3.7	2.6	3.0	1.9	2.2
7/16	4.4	5.0	3.6	4.1	2.5	2.9
1/2	5.7	6.6	4.6	5.4	3.3	3.8
9/16	7.2	8.3	5.8	6.8	4.1	4.8
5/8	8.8	10	7.2	8.3	5.1	5.9
3/4	13	15	10	12	7.3	8.4
7/8	17	20	14	16	9.9	11
1	22	26	18	21	13	15
1-1/8	27	31	22	26	16	18
1-1/4	33	38	27	31	19	22
1-3/8	40	46	33	38	23	27
1-1/2	48	55	39	45	27	32
1-3/4	64	74	52	60	37	42
2	83	95	68	78	48	55
2-1/4	101	116	82	94	58	67
2-1/2	123	141	100	115	71	82
2-3/4	147	169	120	138	85	97
3	173	199	141	162	100	115

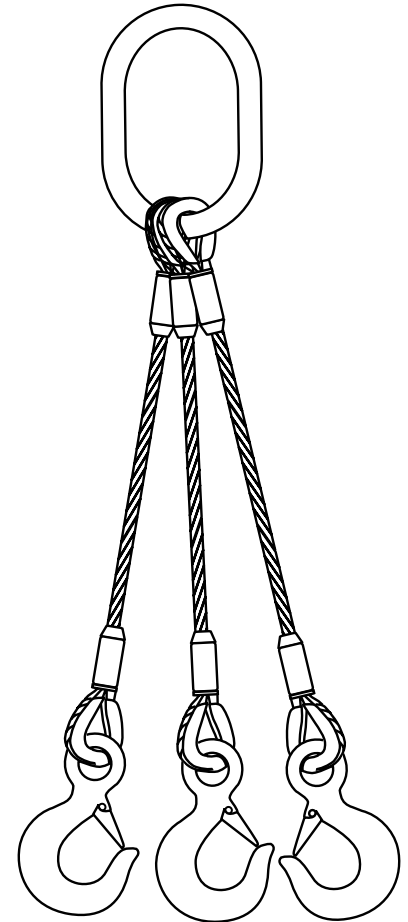

RATED CAPACITIES BASKET HITCH BASED ON *D/d RATIO OF 25

RATED CAPACITIES BASED ON PIN DIAMETER NO LARGER THAN NATURAL EYE WIDTH OR LESS THAN THE NOMINAL SLING DIAMETER

RATED CAPACITIES BASED ON DESIGN FACTOR OF 5:1

HORIZONTAL SLING ANGLES LESS THAN 30 DEGREES SHALL NOT BE USED

*D/d= Diameter of Rope in relation to diameter of object to be lifted.

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.