


WIRE ROPE SLINGS

4 - LEG BRIDLE

FLEMISH SPLICE IWRC

• Rated capacities shown below apply only to 6x19 and 6x36 classification wire rope.

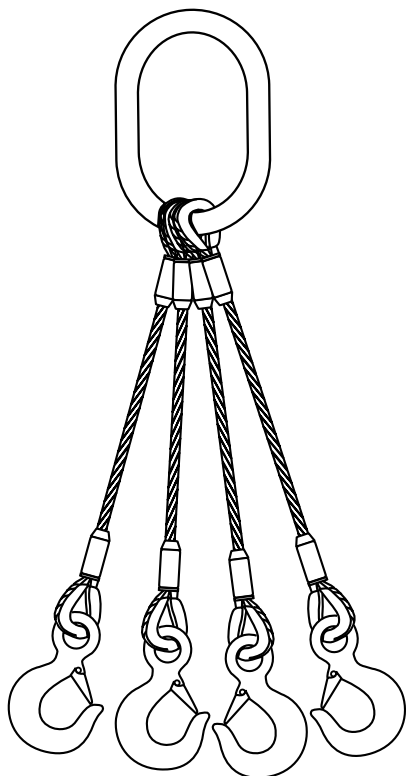

Rope Diameter Inches	60°		45°		30°	
	Rated capacity in tons of 2,000 lbs.					
	IPS	EIPS	IPS	EIPS	IPS	EIPS
1/4	1.9	2.2	1.6	1.8	1.1	1.3
5/16	3.0	3.5	2.5	2.8	1.7	2.0
3/8	4.3	5.0	3.5	4.1	2.5	2.9
7/16	5.9	6.7	4.8	5.5	3.4	3.9
1/2	7.6	8.8	6.2	7.1	4.4	5.1
9/16	9.5	11	7.8	9.0	5.5	6.4
5/8	12	14	9.6	11	6.8	7.8
3/4	17	19	14	16	9.7	11
7/8	23	26	19	21	13	15
1	30	34	24	28	17	20
1-1/8	36	42	30	34	21	24
1-1/4	44	51	36	42	26	30
1-3/8	54	62	44	50	31	36
1-1/2	63	73	52	60	37	42
1-3/4	85	98	70	80	49	57
2	110	127	90	104	64	73
2 1/4	134	154	109	126	77	89
2 1/2	163	188	133	154	94	109
2 3/4	196	225	160	184	113	130
3	231	265	188	216	133	153

RATED CAPACITIES BASKET HITCH BASED ON *D/d RATIO OF 25.

RATED CAPACITIES BASED ON PIN DIAMETER NO LARGER THAN NATURAL EYE WIDTH OR LESS THAN THE NOMINAL SLING DIAMETER.

RATED CAPACITIES BASED ON DESIGN FACTOR OF 5:1.

HORIZONTAL SLING ANGLES LESS THAN 30 DEGREES SHALL NOT BE USED.

*D/d= Diameter of Rope in relation to diameter of object to be lifted.

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.