


**SYNTHETIC SLINGS - TRIANGLE AND CHOKER**

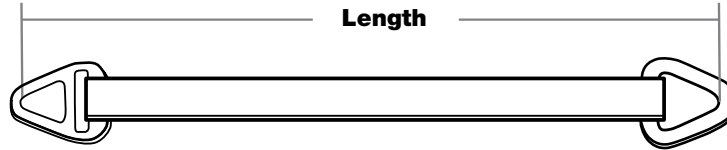

| <b>TRIANGLE - CHOKER SLING</b>   |                                     |                                   |                                   |
|----------------------------------|-------------------------------------|-----------------------------------|-----------------------------------|
| <b>Sling Code</b>                | <b>Vertical Working Load Limit*</b> | <b>Choker Working Load Limit*</b> | <b>Basket Working Load Limit*</b> |
| TC1-802                          | 3,100                               | 2,480                             | 6,200                             |
| TC2-802                          | 6,200                               | 4,960                             | 12,400                            |
| TC1-803                          | 4,650                               | 3,720                             | 9,300                             |
| TC2-803                          | 9,300                               | 7,440                             | 18,600                            |
| TC1-804                          | 6,200                               | 4,960                             | 12,400                            |
| TC2-804                          | 11,000                              | 8,800                             | 22,000                            |
| TC1-806                          | 9,300                               | 7,440                             | 18,600                            |
| TC2-806                          | 16,500                              | 13,200                            | 33,000                            |
| TC1-808                          | 12,400                              | 9,920                             | 24,800                            |
| TC2-808                          | 22,000                              | 17,600                            | 44,000                            |
| <b>TRIANGLE - TRIANGLE SLING</b> |                                     |                                   |                                   |
| TT1-802                          | 3,100                               | -                                 | 6,200                             |
| TT2-802                          | 6,200                               | -                                 | 12,400                            |
| TT1-803                          | 4,650                               | -                                 | 9,300                             |
| TT2-803                          | 9,300                               | -                                 | 18,600                            |
| TT1-804                          | 6,200                               | -                                 | 12,400                            |
| TT2-804                          | 11,000                              | -                                 | 22,000                            |
| TT1-806                          | 9,300                               | -                                 | 18,600                            |
| TT2-806                          | 16,500                              | -                                 | 33,000                            |
| TT1-808                          | 12,400                              | -                                 | 24,800                            |
| TT2-808                          | 22,000                              | -                                 | 44,000                            |

\*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER  
[www.induscowirerope.com](http://www.induscowirerope.com)

**⚠ WARNING** Never exceed working load limit.

See pages 4 - 10 for important safety information.  
 All measurements/units listed are in inches/pounds unless otherwise noted.