


SCREW PIN CHAIN SHACKLES

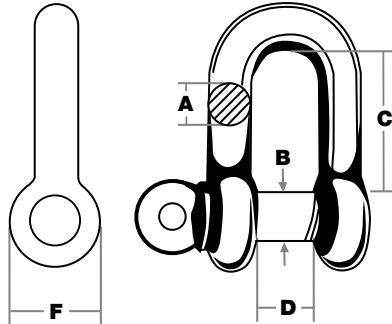

- Drop forged.
- Hot dipped galvanized.
- Meets design requirements of Federal Specification RR-C-271 Type IV B Grade A Class 2.
- See Warnings “**Shackles**” on Page 7 for proper use and selection.

Indusco Part #	A Nominal Size	B Pin Dia.	C	D	F	Weight Each	Working Load Limit*
751 00291	1/4	.31	.88	.47	.69	.10	1,000
751 00301	5/16	.38	1.00	.53	.81	.18	1,500
751 00311	3/8	.44	1.25	.66	.97	.30	2,000
751 00321	7/16	.50	1.50	.72	1.13	.40	3,000
751 00331	1/2	.63	1.69	.81	1.31	.65	4,000
751 00341	5/8	.75	2.00	1.06	1.56	1.30	6,500
751 00351	3/4	.88	2.31	1.25	1.88	2.16	9,500
751 00361	7/8	1.00	2.81	1.44	2.13	3.37	13,000
751 00371	1	1.13	3.25	1.69	2.38	4.90	17,000
751 00381	1-1/8	1.25	3.50	1.81	2.75	7.00	19,000
751 00391	1-1/4	1.38	3.69	2.00	3.00	9.60	24,000
751 00401	1-3/8	1.50	4.50	2.25	3.13	12.00	27,000
751 00406	1-1/2	1.63	5.00	2.38	3.50	16.00	34,000
751 00416	1-3/4	2.00	5.88	2.88	4.00	27.00	50,000
751 00426	2	2.25	6.75	3.25	4.88	43.00	70,000
751 00431	2-1/2	2.75	8.06	4.13	5.50	72.00	110,000

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL 1-800-727-0665 TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.