


CONNECTING LINKS

⚠ WARNING

- **NOT FOR LIFTING.**
- Drop forged.
- Carbon steel.
- Hot dipped galvanized.
- Integral rivets join the two halves; matched lugs distribute the load.
- After making connections, rivets must be peened.
- Meets design requirements according to Federal Specifications RR-C-271, TYPE II.
- See Warnings "Proof Coil Connecting Links" on Page 9 for proper use and selection.

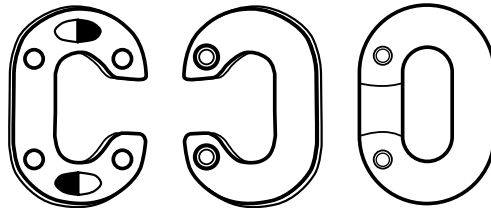

Indusco Part #	Size Inches	Overall Dimensions	Inside Dimensions	Weight Per 100 pcs.	Working Load Limit*
GALVANIZED					
544 00116	3/16**	1.19 x .78	.69 x .34	2.50	800
544 00121	1/4**	1.50 x 1.00	.88 x .44	6.25	1,325
544 00126	5/16**	1.69 x 1.16	.94 x .47	12.50	1,950
544 00131	3/8	2.06 x 1.38	1.13 x .56	20.00	2,750
544 00136	7/16	2.34 x 1.53	1.28 x .59	27.50	3,625
544 00141	1/2	2.67 x 1.72	1.47 x .67	37.50	4,750
544 00146	5/8	3.31 x 2.09	1.81 x .78	72.50	7,250
544 00151	3/4	3.88 x 2.50	2.13 x .94	122.50	10,250
544 00156	7/8	4.50 x 2.91	2.50 x 1.13	175.00	15,500
544 00161	1**	5.00 x 3.31	2.75 x 1.25	250.00	15,500
544 00166	1-1/4	6.13 x 4.18	3.25 x 1.785	470.00	24,000

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 4:1

** HAVE RIVETS ONLY - NO INTERLOCKING LUGS.

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.