


TACKLE BLOCKS

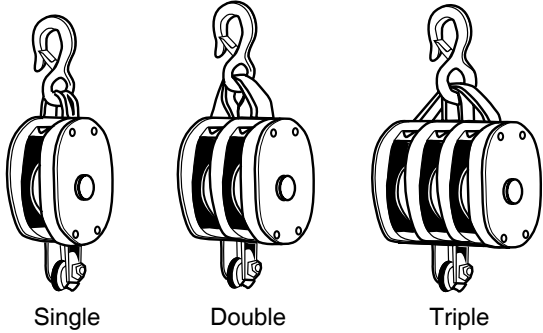


⚠ WARNING

- **INTENDED FOR CORDAGE USE ONLY.**
- Wood shell blocks with galvanized hook.
- Bronze brushed sheaves.
- Becketts furnished on all blocks.
- Available with shackle upon request.
- See Warnings “**Blocks**” on Page 6 for proper use and selection.

Indusco Part #	Size	Rope Diameter	Weight Each	Working Load Limit*
169 00076	4" Single	1/2"	1.8	1,000
169 00101	4" Double	1/2"	3.0	1,400
169 00126	4" Triple	1/2"	4.0	1,800
169 00081	5" Single	5/8"	3.0	1,200
169 00106	5" Double	5/8"	5.0	1,800
169 00131	5" Triple	5/8"	6.0	2,400
169 00086	6" Single	3/4"	5.0	1,800
169 00111	6" Double	3/4"	8.0	2,500
169 00136	6" Triple	3/4"	10.0	3,200
169 00091	8" Single	1"	9.0	2,800
169 00116	8" Double	1"	14.0	3,800
169 00141	8" Triple	1"	21.0	4,800

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 4:1

GIN BLOCKS



⚠ WARNING

- **FOR USE WITH MANILA ROPE.**
- Cast iron sheave.
- Drop forged swivel latch hooks.
- For light hoisting by roofers and contractors.
- See Warnings “**Blocks**” on Page 6 for proper use and selection.

Indusco Part #	Sheave Size	Cordage	Weight Each	Working Load Limit*
169 00156	12"	7/8-1"	14	1,000

*NEVER EXCEED WORK LOAD LIMIT OR 20% OF THE PRODUCTS BREAK STRENGTH.
 *ULTIMATE LOAD IS 3 TIMES THE WORKING LOAD LIMIT

⚠ WARNING

Never exceed working load limit.

CALL 1-800-727-0665 TO PLACE AN ORDER
www.induscowirerope.com

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.