


REGULAR EYEBOLTS

- Drop forged.
- Hot dipped galvanized or stainless steel.
- Furnished with standard hex nuts.
- See Warnings "Eyebolts" on Page 10 for proper use and selection.

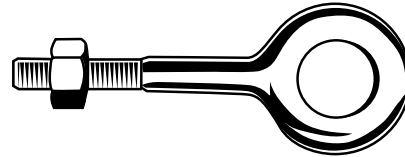

Indusco Part #	Shank Diameter and Length	Length of Thread	Eye Inside Dimension	Eye Outside Dimension	Weight Each	Working Load Limit*
GALVANIZED						
365 00001	1/4 x 2	1.5	.50	1.00	.07	500
365 00006	1/4 x 4	2.5	.50	1.00	.12	500
365 00011	5/16 x 2-1/4	1.5	.62	1.25	.13	800
365 00016	5/16 x 4-1/4	2.5	.62	1.25	.20	800
365 00021	3/8 x 2-1/2	1.5	.75	1.50	.24	1,200
365 00026	3/8 x 4-1/2	2.5	.75	1.50	.31	1,200
365 00031	3/8 x 6	2.5	.75	1.50	.35	1,200
365 00036	1/2 x 3-1/4	1.5	1.00	2.00	.55	2,200
365 00046	1/2 x 6	3	1.00	2.00	.74	2,200
365 00051	1/2 x 8	3	1.00	2.00	.78	2,200
365 00056	1/2 x 10	3	1.00	2.00	.88	2,200
365 00061	1/2 x 12	3	1.00	2.00	1.05	2,200
365 00066	5/8 x 4	2	1.25	2.50	1.01	3,500
365 00071	5/8 x 6	3	1.25	2.50	1.15	3,500
365 00076	5/8 x 8	3	1.25	2.50	1.31	3,500
365 00081	5/8 x 10	3	1.25	2.50	1.52	3,500
365 00086	5/8 x 12	4	1.25	2.50	1.86	3,500
365 00091	5/8 x 15	5	1.25	2.50	2.00	3,500
365 00096	5/8 x 18	5	1.25	2.50	2.10	3,500
365 00101	5/8 x 21	5.5	1.25	2.50	2.40	3,500
365 00106	5/8 x 24	5.5	1.25	2.50	2.65	3,500
365 00111	3/4 x 4-1/2	2	1.50	3.00	1.56	5,200
365 00116	3/4 x 6	3	1.50	3.00	1.84	5,200
365 00121	3/4 x 8	3	1.50	3.00	2.08	5,200
365 00126	3/4 x 10	3	1.50	3.00	2.30	5,200
365 00131	3/4 x 12	4	1.50	3.00	2.52	5,200
365 00136	3/4 x 15	5	1.50	3.00	3.10	5,200
365 00141	7/8 x 5	2.5	1.75	3.50	2.84	7,200

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1.


Continued on next page >>

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.

REGULAR EYEBOLTS (Continued)

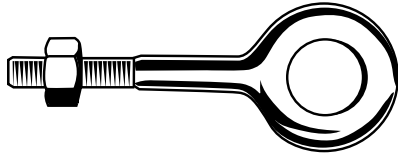

- Drop forged.
- Hot dipped galvanized or stainless steel.
- Furnished with standard hex nuts.
- See Warnings "Eyebolts" on Page 10 for proper use and selection.

Indusco Part #	Shank Diameter and Length	Length of Thread	Eye Inside Dimension	Eye Outside Dimension	Weight Each	Working Load Limit*
GALVANIZED						
365 00146	7/8 x 8	4	1.75	3.50	3.20	7,200
365 00151	7/8 x 12	4	1.75	3.50	3.87	7,200
365 00161	1 x 6	3	2.00	4.00	3.85	10,000
365 00166	1 x 9	4	2.00	4.00	4.52	10,000
365 00171	1 x 12	4	2.00	4.00	5.26	10,000
365 00156	1 x 18	7	2.00	4.00	6.67	10,000
365 00176	1-1/4 x 8	4	2.50	5.00	7.50	15,200
365 00181	1-1/4 x 12	4	2.50	5.00	9.00	15,200
365 00186	1-1/4 x 20	6	2.50	5.00	12.09	15,200
STAINLESS STEEL (TYPE 316)						
365 00191	1/4 x 2	1.5	.50	1.00	.09	500
365 00196	1/4 x 4	2.5	.50	1.00	.12	500
365 00201	5/16 x 2-1/4	1.5	.62	1.25	.16	800
365 00206	5/16 x 4-1/4	2.5	.62	1.25	.17	800
365 00211	3/8 x 2-1/2	1.5	.75	1.50	.24	1,200
365 00216	3/8 x 4-1/2	2.5	.75	1.50	.30	1,200
365 00221	1/2 x 3-1/4	1.5	1.00	2.00	.54	2,200
365 00226	1/2 x 6	3	1.00	2.00	.69	2,200
365 00231	5/8 x 4	2	1.25	2.50	1.04	3,500
365 00236	5/8 x 6	3	1.25	2.50	1.15	3,500
365 00241	3/4 x 4-1/2	2	1.50	3.00	1.65	5,200
365 00246	3/4 x 6	3	1.50	3.00	1.38	5,200

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.