


STUB END TURNBUCKLES

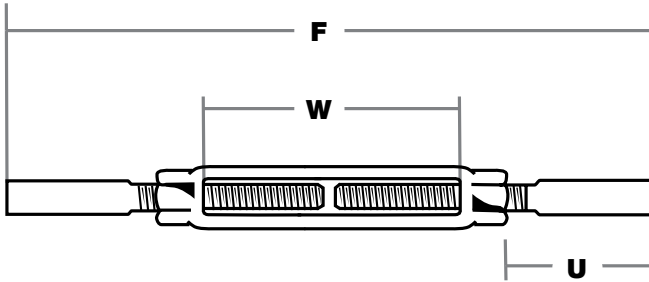

- Drop forged.
- Self-colored.
- Meets design and performance requirements of ASTM F 1145 Class A.
- Reference American Welding Society for proper welding procedures.
- See Warnings "Turnbuckles" on Page 8 for proper use and selection.

Indusco Part #	Threaded Dia. X Take-up	F Closed	U	W	Weight Each	Working Load Limit
939 00023	1/4 x 4	10.00	2.63	4.00	.30	500
939 00061	5/16 x 4-1/2	11.00	2.78	4.50	.50	800
939 00106	3/8 x 6	16.00	4.44	6.00	.85	1,200
939 00156	1/2 x 6	16.00	4.25	6.00	1.25	2,200
939 00246	5/8 x 6	16.00	4.06	6.00	2.37	3,500
939 00336	3/4 x 6	17.00	4.38	6.00	3.36	5,200
939 00366	3/4 x 9	20.00	4.38	9.00	4.20	5,200
939 00396	3/4 x 12	23.00	4.38	12.00	4.90	5,200
939 00441	7/8 x 6	18.00	4.69	6.00	4.85	7,200
939 00501	1 x 6	19.00	5.00	6.00	6.80	10,000
939 00531	1 x 12	25.00	5.00	12.00	8.80	10,000
939 00591	1 x 24	38.00	7.00	24.00	14.30	10,000
939 00596	1-1/4 x 6	20.00	5.44	6.00	10.20	15,200
939 00676	1-1/2 x 6	20.50	4.38	6.00	15.00	21,000
939 00708	1-3/4 x 6	22.00	4.75	6.00	22.00	28,300
939 00739	2 x 6	23.00	4.75	6.00	24.00	37,200
939 00754	2-1/4 x 6	24.00	5.38	6.00	55.85	48,000
939 00755	2-1/2 x 6	26.00	6.50	6.00	59.30	60,000
939 00783	3 x 6	28.00	7.25	6.00	102.30	96,700

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1

CALL **1-800-727-0665** TO PLACE AN ORDER
www.induscowirerope.com

WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.