



SNATCH BLOCKS



With Swivel Shackle

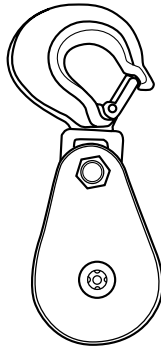

With Swivel Hook

- Steel shell for wire rope.
- Semi-circular guard in shell over sheave prevents wire from slipping between shell and sheave. This feature greatly strengthens the plates in the shell.
- Steel sleeve over center pin gives a bearing surface of large diameter.
- Sleeve is held tightly between the plates and makes the block extremely rigid.
- See Warnings “**Blocks**” on Page 6 for proper use and selection.

| BLOCK SNATCH WITH SWIVEL SHACKLE | | | |
|---|--------------------|------------------------------------|------------------|
| Indusco Part # | Sheave Size | Working Load Limit in TONS* | Wire Size |
| 169 00205 | 4" | 4.5 | 1/2" |
| 169 00215 | 6" | 8 | 5/8" - 3/4" |
| 169 00222 | 10" | 8 | 5/8" - 3/4" |
| 169 00225 | 8" | 12 | 3/4" - 7/8" |
| 169 00256 | 8" | 15 | 3/4" - 7/8" |
| 169 00262 | 8" | 20 | 1" - 1-1/8" |
| 169 00280 | 12" | 20 | 1" - 1-1/8" |
| BLOCK SNATCH WITH SWIVEL HOOK | | | |
| Indusco Part # | Sheave Size | Working Load Limit in TONS* | Wire Size |
| 169 00210 | 4" | 4.5 | 1/2" |
| 169 00220 | 6" | 8 | 5/8" - 3/4" |
| 169 00230 | 8" | 12 | 3/4" - 7/8" |
| 169 00250 | 8" | 15 | 3/4" - 7/8" |
| 169 00268 | 8" | 20 | 1" - 1-1/8" |

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 4:1

CALL 1-800-727-0665 TO PLACE AN ORDER
www.induscowirerope.com

⚠ WARNING Never exceed working load limit.

See pages 4 - 10 for important safety information.
 All measurements/units listed are in inches/pounds unless otherwise noted.